


Gypframe[®] UltraSTEEL[®]

Stud and Track 102 mm

The performance advantage for the RhinoBoard[®]
plasterboard-clad drywalls



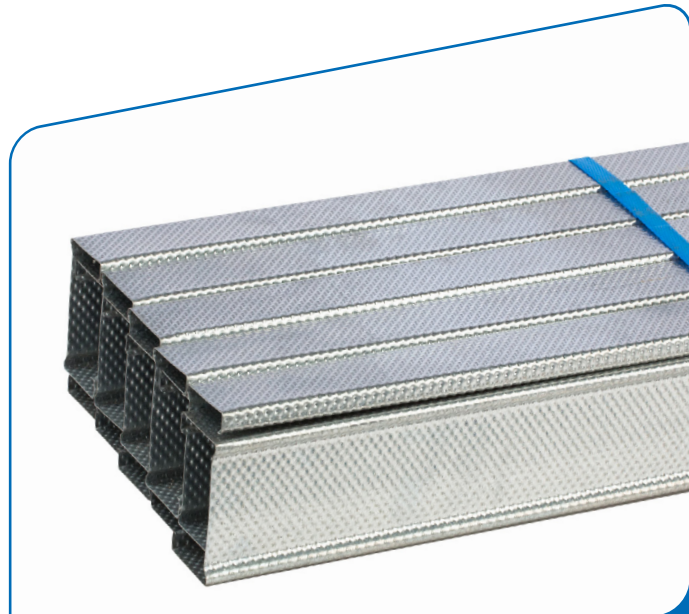


Gypframe® UltraSTEEL® wall frame profiles for all ranges of RhinoBoard®, where joints are finished with jointing tape & RhinoGlide® plaster or a 3 mm RhinoLite® skimcoat.

Gypframe® UltraSTEEL® non-load bearing, wall frame studs and tracks are formed with an apparent gauge of 0.8 mm due to the UltraSTEEL® process. Two service apertures are provided following a Gyproc design at 400 mm centres from each stud end. The UltraSTEEL® rigidising process delivers a profile that improves the rigidity by up to 10% and improves the sharp-point screw retention performance. The Gypframe® UltraSTEEL® stud is supplied in either in bespoke or popular lengths in strapped bundles of



ten pieces. A range of matching head and floor tracks, in standard, deep and extra deep format are available. As with the studs, bespoke track options are available.

T = steel gauge, 2T = apparent gauge

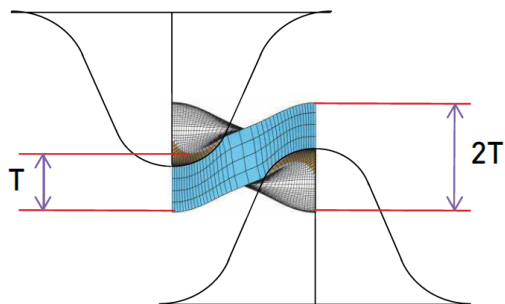


Gypframe® UltraSTEEL® Stud 102 mm

Oil-coating	None
Spangle	Standard
Work Hardening	UltraSTEEL®
Anti-corrosive coating	Z150
Thickness tolerance	±0.02 mm
Steel gauge	0.58 mm
Dimension (Web - A)	102 mm
Dimension (Flange - B)	34.8 mm
Dimension (Lip - C)	8.1 mm



Gypframe® UltraSTEEL® Track 102 mm

Oil-coating	None
Spangle	Standard
Anti-corrosive coating	Z150
Thickness tolerance	±0.02 mm
Steel gauge	0.4 mm
Dimension (Web)	102 mm
Dimension (Flange)	24 mm



Gypframe® UltraSTEEL® Drywall Stud 102 mm (MTO)	Material Code	Length mm	Width (A) mm	Pack Format	Approx Weight Kg per UOM
	4742	2400	102	Bundle of 10	2.34
	4743	2700	102	Bundle of 10	2.64
	4744	3000	102	Bundle of 10	2.93
	10021	3300	102	Bundle of 10	3.22
	4745	3600	102	Bundle of 10	3.52
	20119	3000	102	Bundle of 10	26.4
	20120	3300	102	Bundle of 10	27.72
	20121	3600	102	Bundle of 10	32.2

Gypframe® UltraSTEEL® Track 102 mm	Material Code	Length mm	Width (A) mm	Pack Format	Approx Weight Kg per UOM
	20122	3000	102	Bundle of 10	15.6

Installation of Gypframe® UltraSTEEL® Stud 102 mm into Gypframe® UltraSTEEL® track.

Gypframe® UltraSTEEL® track should be fixed directly to the substrate using propriety fixings. Two lines of proprietary fixings to steel track should always be staggered at a maximum of 300 mm centers in the center of the track as recommended by specifications and drywall guidelines.

The Gypframe® UltraSTEEL® 102 mm studs (locally manufactured, recycled content, ISO 9001 and 14001 certification) will be friction fitted into top and bottom Gypframe® UltraSTEEL® 102 mm tracks at 600 mm and 400mm centers as required by the height detail.

UltraSTEEL®

Products are manufactured using the UltraSTEEL® process are protected by South African patents(2009/04144). UltraSTEEL® is a registered trademark of Hadley Industries Overseas Holdings Limited.



SAINT-GOBAIN

GYPROC a division of Saint-Gobain Construction Products SA (Pty) Ltd

300 Janadel Avenue • Halfway House
• Midrand 1686 • South Africa

PO Box 50416 • Randjiesfontein
• 1683 • South Africa

+27 (0)12 657 2800

www.gyproc.co.za



Gypframe®

THE EFFICIENT
**CEILING AND
PARTITION
BACKBONE™**

South Africa, 04/2024. Gyproc reserves the right to modify data without prior notice. If required, please contact the Gyproc Technical Department. Saint-Gobain Construction Products South Africa (Pty) Ltd. Reg no: 1937/010220/07

