

Gypframe[®] Essential

T38 Exposed
Ceiling Grid

NEW PRODUCT



Fit-for-purpose


The Gypframe® Essential exposed ceiling grid is fit-for-purpose. This T38 format ceiling grid provides the installer with an affordable solution from Gyproc.

Lay-in tile ceiling grid products do not all require 'ultimate' performance. This ultimate performance characteristic may, as is the case for Gypframe® DONN T38 FR, be concerned with a fire-resistant grid and tile combination.

When the requirement for the ceiling does not extend to fire-resistance, a durable easy-to-install, reliable grid is needed and Gyproc has the essential solution.

- ▶ Easy familiar installation
- ▶ Dependable cross-to-main tee clips
- ▶ Matching depth, main and cross tees
- ▶ Durability and corrosion (rust) resistance
- ▶ Bright, smooth and consistent white capping

Gypframe® ceiling grid products are manufactured in South Africa, engineered for local conditions.

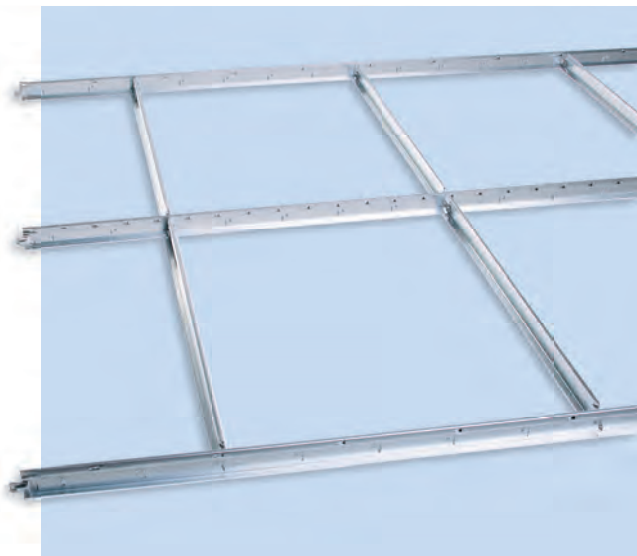

Gypframe® Essential allows for both 600 x 600 & 600 x 1200 mm ceiling tiles.

Product performance

Gyproc's R&D team have evaluated the system performance of the product and following the ASTM C635 standard is classified as a light-weight grid, suited to carry a load no greater than 12 Kg/m².

Gypframe[®] Essential is supported by the standard Gyproc product warranty.

Specifications

Profile	T-bar 38 mm web with 24 mm face
Capping	Frost White painted steel
Metal gauge	Main tee & capping = 0.30 mm Cross tee = 0.25 mm
Galvanizing level	Z100 (C1 & C2)
Duty rating	Light Duty - 12.0 kg/m ²
Suspension	Galvanized wire or hanger strap
Pieces/box	3600 mm main tee 20 pieces
Weight/box	(22.8 Kg)
.	60 pieces 1200 mm cross tee
.	(19.5 Kg)
.	60 pieces 600 mm cross tee
.	(9.6 Kg)
Other	No Fire-notch, bulb hole spacing 150 mm centre-to-centre



← Cross Tees

Main Tees →

www.gyproc.co.za
0860 27 28 29



GYPROC a division of Saint-Gobain
Construction Products SA (Pty) Ltd

Block A • Siemens Park • 300 Janadel Avenue
Halfway House • Midrand • South Africa

PO Box 50416 • Randjesfontein
• 1683 • South Africa

+27 (0)12 657 2800

www.gyproc.co.za

Material code	Gypframe® Essential Exposed Ceiling-grid	Supply Format (QTY)	EAN 13 code	Length (mm)	Face (mm)	Depth (mm)	Metal Gauge (mm)	Anti-corrosion coating	Capping Colour	Weight/ piece
24242	Gypframe® Essential Main Tee (3600 mm)	Box (20 pieces)	6007353000002	3600	24	38	0,3	Z100	Frost White	1,105 Kg
24248	Gypframe® Essential Cross Tee (1200 mm)	Box (60 pieces)	6007353000019	1200	24	38	0,25	Z100	Frost White	0,315 Kg
24247	Gypframe® Essential Cross Tee (600 mm)	Box (60 pieces)	6007353000026	600	24	38	0,25	Z100	Frost White	0,115 Kg



Gypframe®

THE EFFICIENT
**CEILING AND
PARTITION
BACKBONE**

SAINT-GOBAIN CONSTRUCTION
PRODUCTS SOUTH AFRICA (PTY) LTD.
Reg no: 1937/010220/07



Main Tee 3600 mm

Cross Tee 1200 mm

Cross Tee 600 mm

South Africa, 01/2021
Gyproc reserves the right to modify data
without prior notice. If required, please
contact the Gyproc Technical Department.